

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A63B 37/06, 37/08, 37/12	A1	(11) International Publication Number: WO 00/57962 (43) International Publication Date: 5 October 2000 (05.10.00)
---	----	--

(21) International Application Number: PCT/US99/06846
(22) International Filing Date: 29 March 1999 (29.03.99)
(71) Applicant: SPALDING SPORTS WORLDWIDE, INC.
[US/US]; 425 Meadow Street, P.O. Box 901, Chicopee,
MA 01021-0901 (US).
(72) Inventors: KELLER, Viktor, M.; 2 Elm Meadows, Enfield,
CT 06082 (US). KENNEDY, Thomas; 3 Mirick Lane,
Wildbraham, MA 01095 (US). RISEN, William; 87 Miller
Street, Rumford, RI 02916 (US).
(74) Agents: KLEIN, Richard, M. et al.; Spalding Sports World-
wide, Inc., 425 Meadow Street, P.O. Box 901, Chicopee,
MA 01021-0901 (US).

(81) Designated States: AU, CA, GB, JP.


Published

With international search report.

(54) Title: GOLF BALL WHICH INCLUDES FAST-CHEMICAL-REACTION-PRODUCED COMPONENT AND METHOD OF MAKING SAME

(57) Abstract

Disclosed herein is a golf ball (10, 20, 30) comprising fast-chemical-reaction-produced component, such as a component which comprises a reaction injection molded polyurethane material. A process of making a golf ball (10, 20, 30) by forming at least one core (12, 22, 32) and/or cover (14, 24, 34, 36) component of the ball by mixing two or more reactants that react and form a reaction product with a flex modulus of 5-310 kpsi in a reaction time of about 5 minutes or less, the component having a thickness of at least 0.01 inches and a demold time of 10 minutes or less is disclosed. In one preferred form of the invention, excess polyurethane from forming golf ball covers (14, 24, 34, 36) is recycled by using it to form golf ball cores (12, 22, 32).

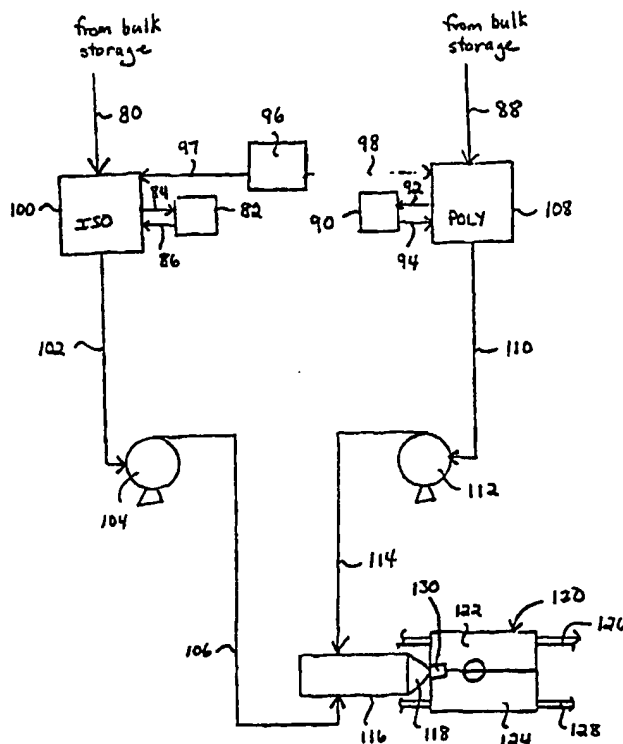

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**GOLF BALL WHICH INCLUDES
FAST-CHEMICAL-REACTION-PRODUCED
COMPONENT AND METHOD OF MAKING SAME**

Field and Background of the Invention

5 The invention relates generally to golf balls, and more particularly to golf balls which contain a fast-chemical-reaction-produced component, such as a core and/or cover layer.

Golf balls comprise, in general, three types. The first type is a multi-piece wound ball wherein a vulcanized rubber thread is wound under tension around a
10 solid or semi-solid core, and thereafter enclosed in a single or multi-layer covering of a tough, protective material. A second type of a golf ball is a one-piece ball formed from a solid mass of resilient material which has been cured to develop the necessary degree of hardness to provide utility. One-piece molded balls do not have a second enclosing cover. A third type of ball is a
15 multi-piece non-wound ball which includes a liquid, gel or solid core of one or more layers and a cover having one or more layers formed over the core.

Conventional golf ball covers have been made of ionomer, balata, and slow-reacting, thermoset polyurethane. When polyurethane covers are made by conventional methods, such as by casting, a substantial amount of time and
20 energy are required, thus resulting in relatively high cost.

It would be useful to develop a golf ball containing a fast-chemical-reaction-produced component, such as at least one core or cover layer, particularly one which contains polyurethane, polyurea, epoxy and/or unsaturated polyester.

25 **Summary of the Invention**

An object of the invention is to produce a golf ball having a polyurethane cover which is formed by a fast chemical reaction.

Another object of the invention is to provide a non-ionomeric golf ball cover which is efficiently produced by injection molding.

Yet another object of the invention is to provide a golf ball which contains polyurethane.

A further object of the invention is to provide a golf ball in which material from recycling polyurethane can be used to result in an efficient manufacturing
5 process.

A further object of the invention is to produce a durable golf ball containing polyurethane, polyurea, epoxy, and/or unsaturated polyesters.

Another object of the invention is to provide a golf ball with a "seamless" cover layer, i.e., a cover layer having generally the same microscopic and
10 molecular structure distribution both in the regions adjacent to the parting line of the mold and at locations which are not adjacent to the parting line, including near the poles.

Yet another object of the invention is to provide a method of making a golf ball of the type described above.

15 Other objects of the invention will become apparent from the specification, drawings and claims.

A preferred form of the invention is a method of making a multi-piece golf ball comprising making at least one of a cover component and a core component of the ball by mixing two or more materials that react to form a
20 reaction product with a flex modulus of 5 - 310 kpsi in a reaction time of about 5 minutes or less, the component having a thickness of at least 0.01 inches and a demold time of 10 minutes or less including the reaction time.

The composition preferably comprises at least one member selected from the group consisting of polyurethanes, polyureas, epoxies and unsaturated
25 polyesters. The reaction product preferably is formed by reaction injection molding. The component preferably has a thickness of at least 0.02 inches.

Another preferred form of the invention is a multi-piece golf ball comprising a reaction injection molded material comprising polyurethane/polyurea. The golf ball cover preferably has a Shore D hardness
30 in the range of 20 - 95, more preferably 30 - 75, and a flex modulus in the range

of 5 - 310 kpsi, and more preferably 5 - 100 kpsi and even more preferably 10 - 80 kpsi. Preferably, at least 5% of the polyurethane/polyurea is formed from molecules obtained by recycling a material comprising at least one of polyurethane, polyurea, polyester and polyethylene glycol.

5 Yet another preferred form of the invention is a process for producing a golf ball including the step of reaction injection molding a polyurethane/polyurea material to form at least one of a core layer and a cover layer of the ball.

A further preferred form of the invention is a process for producing a golf
10 ball comprising the steps of (a) reaction injection molding a polyurethane/polyurea component of the ball, and (b) recycling some of the polyurethane and/or polyurea that is produced in connection with step (a) but that is not incorporated in the golf ball in step (a). The polyurethane/polyurea preferably, but not necessarily, is recycled by glycolysis.

15 Yet another preferred form of the invention is a process for producing a golf ball comprising (a) forming a core, (b) covering the core, and (c) coating and adding indicia to the covered ball, wherein at least one of steps (a) and (b) comprises reaction injection molding of a polyurethane and/or polyurea material.

20 The golf ball of the invention can include, in the cover, optical brighteners, white pigment, UV stabilizers, antioxidants, etc. The cover and/or core may further include fillers such as TiO_2 , glass, metal, and other fillers described below.

Yet another preferred form of the invention is a golf ball having a cover
25 comprising a blend of polyurethane and ionomer, wherein the ionomer is a partially cation neutralized organic acid polymer, preferably an alpha, beta unsaturated carboxylic acid with 3 or more carbon atoms. The ionomer may be a polyurethane ionomer.

A further preferred form of the invention is a golf ball comprising at least one fast-chemical-reaction-produced layer, said layer having a flex modulus of 5 - 300 kpsi in a reaction time of 5 minutes or less and a thickness of at least 0.01".

5 Yet another preferred form of the invention is a golf ball having a core and a cover, the cover comprising polyurethane/polyurea which is formed from reactants, 5 - 100 weight percent of which are obtained from recycled polyurethane.

Brief Description of the Drawings

10 Fig. 1 is a first embodiment of a golf ball formed according to a reaction injection molded (RIM) process according to the invention.

Fig. 2 is a second embodiment of a golf ball formed according to a reaction injection molded (RIM) process according to the invention.

15 Fig. 3 is a third embodiment of a golf ball formed according to a reaction injection molded (RIM) process according to the invention.

Fig. 4 is a process flow diagram which schematically depicts a reaction injection molding process according to the invention.

Fig. 5 schematically shows a mold for reaction injection molding a golf ball cover according to the invention.

20 Detailed Description of the Invention

The present invention is a golf ball in which at least one cover or core layer is a fast-chemical-reaction-produced component. This component comprises at least one material selected from the group consisting of polyurethane, polyurea, polyurethane ionomer, epoxy, and unsaturated
25 polyesters, and preferably comprises polyurethane. The invention also includes a method of producing a golf ball which contains a fast-chemical-reaction-produced component. A golf ball formed according to the invention preferably has a flex modulus in the range of 5 - 310 kpsi, a Shore D hardness in the range of 20 - 90, and good durability. Particularly preferred
30 forms of the invention also provide for a golf ball with a

fast-chemical-reaction-produced cover having good scuff resistance and cut resistance. As used herein, "polyurethane and/or polyurea" is expressed as "polyurethane/polyurea".

A particularly preferred form of the invention is a golf ball with a cover
5 comprising polyurethane, the cover including 5 - 100 weight percent of polyurethane formed from recycled polyurethane.

The method of the invention is particularly useful in forming golf balls because it can be practiced at relatively low temperatures and pressures. The preferred temperature range for the method of the invention is 120 - 180°F
10 when the component being produced contains polyurethane. Preferred pressures for practicing the invention using polyurethane-containing materials are 200 psi or less and more preferably 100 psi or less. The method of the present invention offers numerous advantages over conventional slow-reactive process compression molding of golf ball covers. The method of the present invention
15 results in molded covers in a demold time of 10 minutes or less. An excellent finish can be produced on the ball.

The method of the invention also is particularly effective when recycled polyurethane or other polymer resin, or materials derived by recycling polyurethane or other polymer resin, is incorporated into the product.

20 As indicated above, the fast-chemical-reaction-produced component can be one or more cover and/or core layers of the ball. When a polyurethane cover is formed according to the invention, and is then covered with a polyurethane top coat, excellent adhesion can be obtained. The adhesion in this case is better than adhesion of a polyurethane coating to an ionomeric cover. This improved
25 adhesion can result in the use of a thinner top coat, the elimination of a primer coat, and the use of a greater variety of golf ball printing inks beneath the top coat. These include but are not limited to typical inks such as one component polyurethane inks and two component polyurethane inks.

The preferred method of forming a fast-chemical-reaction-produced
30 component for a golf ball according to the invention is by reaction injection

molding (RIM). RIM is a process by which highly reactive liquids are injected into a closed mold, mixed usually by impingement and/or mechanical mixing in an in-line device such as a "peanut mixer", where they polymerize primarily in the mold to form a coherent, one-piece molded article. The RIM processes
5 usually involve a rapid reaction between one or more reactive components such as polyether - or polyester - polyol, polyamine, or other material with an active hydrogen, and one or more isocyanate - containing constituents, often in the presence of a catalyst. The constituents are stored in separate tanks prior to molding and may be first mixed in a mix head upstream of a mold and then
10 injected into the mold. The liquid streams are metered in the desired weight to weight ratio and fed into an impingement mix head, with mixing occurring under high pressure, e.g., 1500 - 3000 psi. The liquid streams impinge upon each other in the mixing chamber of the mix head and the mixture is injected into the mold. One of the liquid streams typically contains a catalyst for the
15 reaction. The constituents react rapidly after mixing to gel and form polyurethane polymers. Polyureas, epoxies, and various unsaturated polyesters also can be molded by RIM.

RIM differs from non-reaction injection molding in a number of ways. The main distinction is that in RIM a chemical reaction takes place in the mold
20 to transform a monomer or adducts to polymers and the components are in liquid form. Thus, a RIM mold need not be made to withstand the pressures which occur in a conventional injection molding. In contrast, injection molding is conducted at high molding pressures in the mold cavity by melting a solid resin and conveying it into a mold, with the molten resin often being at about
25 150 - 350°C. At this elevated temperature, the viscosity of the molten resin usually is in the range of 50,000 - 1,000,000 centipoise, and is typically around 200,000 centipoise. In an injection molding process, the solidification of the resins occurs after about 10 - 90 seconds, depending upon the size of the molded product, the temperature and heat transfer conditions, and the hardness of the
30 injection molded material. Subsequently, the molded product is removed from

the mold. There is no significant chemical reaction taking place in an injection molding process when the thermoplastic resin is introduced into the mold. In contrast, in a RIM process, the chemical reaction typically takes place in less than about two minutes, preferably in under one minute, and in many cases in
5 about 30 seconds or less.

If plastic products are produced by combining components that are performed to some extent, subsequent failure can occur at a location on the cover which is along the seam or parting line of the mold. Failure can occur at this location because this interfacial region is intrinsically different from the
10 remainder of the cover layer and can be weaker or more stressed. The present invention is believed to provide for improved durability of a golf ball cover layer by providing a uniform or "seamless" cover in which the properties of the cover material in the region along the parting line are generally the same as the properties of the cover material at other locations on the cover, including at the
15 poles. The improvement in durability is believed to be a result of the fact that the reaction mixture is distributed uniformly into a closed mold. This uniform distribution of the injected materials eliminates knit-lines and other molding deficiencies which can be caused by temperature difference and/or reaction difference in the injected materials. The process of the invention results in
20 generally uniform molecular structure, density and stress distribution as compared to conventional injection-molding processes.

The fast-chemical-reaction-produced component has a flex modulus of 5 - 310 kpsi, more preferably 5 - 100 kpsi, and most preferably 5 - 50 kpsi. The subject component can be a cover with a flex modulus which is higher than that
25 of the centermost component of the cores, as in a liquid center core and some solid center cores. Furthermore, the fast-chemical-reaction-produced component can be a cover with a flex modulus that is higher than that of the immediately underlying layer, as in the case of a wound core. The core can be one piece or multi-layer, each layer can be either foamed or unfoamed, and

density adjusting fillers, including metals, can be used. The cover of the ball can be harder or softer than any particular core layer.

The fast-chemical-reaction-produced component can incorporate suitable additives and/or fillers. When the component is an outer cover layer, pigments or dyes, accelerators and UV stabilizers can be added. Examples of suitable optical brighteners which probably can be used include Uvitex and Eastobrite OB-1. An example of a suitable white pigment is titanium dioxide. Examples of suitable and UV light stabilizers are provided in commonly assigned U.S. Patent No. 5,494,291. Fillers which can be incorporated into the fast-chemical-reaction-produced cover or core component include those listed below in the definitions section. Furthermore, compatible polymeric materials can be added. For example, when the component comprises polyurethane and/or polyurea, such polymeric materials include polyurethane ionomers, polyamides, etc.

15 A golf ball core layer formed from a fast-chemical-reaction-produced material according to the present invention typically contains 0 - 20 weight percent of such filler material, and more preferably 1 - 15 weight percent. When the fast-chemical-reaction-produced component is a core, the additives typically are selected to control the density, hardness and/or COR.

20 A golf ball inner cover layer formed from a fast-chemical-reaction-produced material according to the present invention typically contains 0 - 60 weight percent of filler material, more preferably 1 - 30 weight percent, and most preferably 1 - 20 weight percent.

25 A golf ball outer cover layer formed from a fast-chemical-reaction-produced material according to the present invention typically contains 0 - 20 weight percent of filler material, more preferably 1 - 10 weight percent, and most preferably 1 - 5 weight percent.

Catalysts can be added to the RIM polyurethane system starting materials as long as the catalysts generally do not react with the constituent with which

they are combined. Suitable catalysts include those which are known to be useful with polyurethanes and polyureas.

The reaction mixture viscosity should be sufficiently low to ensure that the empty space in the mold is completely filled. The reactant materials
5 generally are preheated to 100 - 150°F before they are mixed. In most cases it is necessary to preheat the mold to, e.g., 100 - 120°F, to ensure proper injection viscosity.

As indicated above, one or more cover layers of a golf ball can be formed from a fast-chemical-reaction-produced material according to the present
10 invention.

Referring now to the drawings, and first to Fig. 1, a golf ball having a cover comprising a RIM polyurethane is shown. The golf ball 10 includes a polybutadiene core 12 and a polyurethane cover 14 formed by RIM.

Referring now to Fig. 2, a golf ball having a core comprising a RIM
15 polyurethane is shown. The golf ball 20 has a RIM polyurethane core 22, and a RIM polyurethane cover 24.

Referring to Fig. 3, a multi-layer golf ball 30 is shown with a solid core 32 containing recycled RIM polyurethane, a mantle cover layer comprising RIM polyurethane, and an outer cover layer comprising ionomer or another
20 conventional golf ball cover material. Non-limiting examples of multi-layer golf balls according to the invention with two cover layers include those with RIM polyurethane mantles having a thickness of 0.02 - 0.20 inches and a Shore D hardness of 20 - 80, covered with ionomeric or non-ionomeric thermoplastic, balata or other covers having a Shore D hardness of 20 - 80 and a thickness of
25 0.025 - 0.20 inches.

Referring next to Fig. 4, a process flow diagram for forming a RIM cover of polyurethane is shown. Isocyanate from bulk storage is fed through line 80 to an isocyanate tank 100. The isocyanate is heated to the desired temperature, e.g. 100 - 120°F, by circulating it through heat exchanger 82 via lines 84 and
30 86. Polyol, polyamine, or another compound with an active hydrogen atom is

conveyed from bulk storage to a polyol tank 108 via line 88. The polyol is heated to the desired temperature, e.g. 100 - 120°F, by circulating it through heat exchanger 90 via lines 92 and 94. Dry nitrogen gas is fed from nitrogen tank 96 to isocyanate tank 100 via line 97 and to polyol tank 108 via line 98.

5 Isocyanate is fed from isocyanate tank 100 via line 102 through a metering cylinder or metering pump 104 into recirculation mix head inlet line 106. Polyol is fed from polyol tank 108 via line 110 through a metering cylinder or metering pump 112 into a recirculation mix head inlet line 114. The recirculation mix head 116 receives isocyanate and polyol, mixes them, and

10 provides for them to be fed through nozzle 118 into injection mold 120. The injection mold 120 has a top mold 122 and a bottom mold 124. Coolant flows through cooling lines 126 in the top mold 122 and lines 128 in the bottom mold 124. The materials are kept under controlled temperature conditions to insure that the desired reaction profile is maintained.

15 The polyol component typically contains additives, such as stabilizers, flow modifiers, catalysts, combustion modifiers, blowing agents, fillers, pigments, optical brighteners, and release agents to modify physical characteristics of the cover. Recycled polyurethane/polyurea also can be added to the core. Polyurethane/polyurea constituent molecules that were derived

20 from recycled polyurethane can be added in the polyol component.

Inside the mix head, injector nozzles impinge the isocyanate and polyol at ultra-high velocity to provide excellent mixing. Additional mixing preferably is conducted using an aftermixer 130, which typically is constructed inside the mold between the mix head and the mold cavity.

25 As is shown in Fig 5, the mold includes a golf ball cavity chamber 132 in which a spherical golf ball mold 134 with a dimpled, spherical mold cavity 136 is positioned. The aftermixer 130 can be a peanut aftermixer, as is shown in Fig 5, or in some cases another suitable type, such as a heart, harp or dipper. An overflow channel 138 receives overflow material from the golf ball mold 134

30 through a shallow vent 136. Cooling water passages 138, which preferably are

in a parallel flow arrangement, carry cooling water through the top mold 122 and the bottom mold 124.

The mold cavity contains retractable pins and is generally constructed in the same manner as a mold cavity used to injection mold a thermoplastic, e.g.,
5 ionomeric golf ball cover. However, a few differences when RIM is used are that tighter pin tolerances generally are required, a lower mold temperature is used, and a lower injection pressure is used. Also, the molds can be produced from lower strength material such as aluminum.

The golf balls formed according to the present invention can be coated
10 using a conventional two-component spray coating or can be coated during the RIM process, i.e., using an in-mold coating process.

One of the significant advantages of the RIM process according to the invention is that polyurethane or other cover material can be recycled and used in golf ball cores. Recycling can be conducted by, e.g., glycolysis. Typically,
15 10 - 80% of the material which is injection molded actually becomes part of the cover. The remaining 20 - 90% is recycled.

Recycling of polyurethanes by glycolysis is known from, for example, RIM Part and Mold Design - Polyurethanes, 1995, Bayer Corp., Pittsburgh, PA. Another significant advantage of the present invention is that because reaction
20 injection molding occurs at low temperatures and pressures, i.e., 120 - 180°F and 100 - 200 psi, this process is particularly beneficial when a cover is to be molded over a very soft core. When higher pressures are used for molding over soft cores, the cores "shut off" i.e., deform and impede the flow of material causing uneven distribution of cover material.

25 One polyurethane component which can be used in the present invention incorporates TMXDI (META) aliphatic isocyanate (Cytec Industries, West Paterson, NJ). Polyurethanes based on meta-tetramethylxylylene diisocyanate can provide improved gloss retention UV light stability, thermal stability hydrolytic stability. Additionally, TMXDI (META) aliphatic isocyanate has
30 demonstrated favorable toxicological properties. Furthermore, because it has a

low viscosity, it is usable with a wider range of diols (to polyurethane) and diamines (to polyureas). If TMXDI is used, it typically, but not necessarily, is added as a direct replacement for some or all of the other aliphatic isocyanates in accordance with the suggestions of the supplier. Because of slow reactivity
5 of TMXDI, it may be useful or necessary to use catalysts to have practical demolding times. Hardness, tensile strength and elongation can be adjusted by adding further materials in accordance with the supplier's instructions.

Golf ball cores also can be made using the materials and processes of the invention. To make a golf ball core using RIM polyurethane, the same
10 processing conditions are used as are described above with respect to covers. One difference is, of course, that no retractor pins are needed in the mold. Furthermore, an undimpled, smaller mold is used. If, however, a one piece ball is desired, a dimpled mold would be used. Polyurethanes also can be used for cores.

15 Golf balls typically have indicia and/or logos stamped or formed thereon. Such indicia can be applied by printing using a material or a source of energetic particles after the ball core and/or cover have been reaction-injection-molded according to the present invention. Printed indicia can be formed from a material such as ink, foil (for use in foil transfer), etc. Indicia printed using a
20 source of energetic particles or radiation can be applied by burning with a laser, burning with heat, directed electrons, or light, phototransformations of, e.g., UV ink, impingement by particles, impingement by electromagnetic radiation etc. Furthermore, the indicia can be applied in the same manner as an in-mold coating, i.e., by applying to the indicia to the surface of the mold prior to
25 molding of the cover.

The polyurethane which is selected for use as a golf ball cover preferably has a Shore D hardness of 40 - 75, more preferably 40 - 60, and most preferably 40 - 50 for a soft cover layer and 50 - 60 for a hard cover layer. The polyurethane which is to be used for a cover layer preferably has a flex modulus

of 5 - 310 kpsi, more preferably 5 - 100 kpsi, and most preferably 5 -20 kpsi for a soft cover layer and 30 - 40 kpsi for a hard cover layer.

Non-limiting examples of suitable RIM systems for use in the present invention are Bayflex® elastomeric polyurethane RIM systems, Baydur® GS
5 solid polyurethane RIM systems, Prism® solid polyurethane RIM systems, all from Bayer Corp. (Pittsburgh, PA), SPECTRIM reaction moldable polyurethane and polyurea systems from Dow Chemical USA (Midland, MI), including SPECTRIM MM 373-A (isocyanate) and 373-B (polyol), and Elastolit SR systems from BASF (Parsippany, NJ). Preferred RIM systems include
10 Bayflex® MP-10000 and Bayflex® 110-50, filled and unfilled. Further preferred examples are polyols, polyamines and isocyanates formed by processes for recycling polyurethanes and polyureas. Peroxides, such as MEK-peroxide and dicumyl peroxide can be used. Furthermore, catalysts or activators such as cobalt octoate 6% can be used.

15 The following examples are included for purposes of illustration and are not intended to be limiting.

Example 1

A polybutadiene golf ball core having a diameter of 1.545", a PGA compression of about 65 and a coefficient of restitution of about 0.770 was
20 obtained. A dimpled cover having a thickness of 0.0675" was reaction injection molded over the core. The cover comprised Bayflex MP 10000 resin (Bayer). The resulting ball had a PGA compression of 78, a COR of 0.720 and a Shore D cover hardness of 39. The ball met standard durability tests and had an excellent scuff resistance rating of 1. It is expected that this cover also has an
25 excellent cut resistance rating.

Example 2 (Prophetic)

A golf ball core formed from high cis polybutadiene, zinc diacrylate, zinc oxide, zinc stearate, and peroxide initiator is obtained. The core has a diameter of 1.49".

The core is covered with a 0.04" thick mantle layer of RIM polyurethane which has a plaque Shore D hardness of 58, namely Bayflex® 110-50 unfilled (Bayer Corp.). The mantle layer is covered with a 0.055" thick dimpled outer cover layer of Iotek 8000, 7510 and 7030, and a whitener package. The
5 formulation and properties of the golf ball are shown below on Table 1.

Example 3 (Prophetic)

A golf ball core formed from high-cis polybutadiene, zinc diacrylate, zinc oxide, zinc stearate and peroxide imitator is obtained. The core has a diameter of 1.49".

10 The core is covered with a 0.040" thick mantle layer of RIM polyurethane having a plaque Shore A hardness of about 90, namely Bayflex® MP 10000 unfilled (Bayer Corp.). The mantle layer is covered with a 0.055" thick dimpled outer cover layer of Ex 1006 and 1007 (Exxon Corp.) and Iotek 7030 (Exxon Corp.). The formulations and properties of the golf ball are shown below in
15 Table 1.

Example 4 (Prophetic)

A golf ball core formed from high-cis polybutadiene, zinc diacrylate, zinc oxide, zinc stearate, and peroxide initiator is obtained. The core has a diameter of 1.49".

20 The core is covered with a 0.055" thick mantle layer of Iotek 1002 and 1003 (Exxon Corp.). The mantle layer is covered with a 0.04" thick dimpled outer cover layer of RIM Bayflex® MP10000 unfilled (Bayer Corp.). The formulation and properties of the golf ball are shown below on Table 1.

Example 5 (Prophetic)

25 A golf ball core having a diameter of 1.42" is formed from an elastomeric unfilled RIM polyurethane (Bayflex® MP10000, Bayer Corp.). The core is covered with a 0.08" thick injection-molded mantle layer of 50 parts by weight Iotek 1002 and 50 parts by weight Iotek 1003. The mantle layer is covered with a 0.050" thick injection-molded outer cover layer of Ex 1006, Ex 1007, Iotek

7030, and whitener. The formulation and properties of the golf ball are shown below on Table 1.

TABLE 1

Chemical Component	Example 2	Example 3	Example 4	Example 5
Core Data				
Size	1.49"	1.49"	1.49"	1.42"
Type				
Polybutadiene	Y	Y	Y	---
RIM Polyurethane	---	---	---	Y
Inner Cover Layer				
Size	1.57"	1.57"	1.57"	1.58"
Weight	38g	---	38g	---
Thickness	0.040"	0.040"	0.055"	0.080"
Hardness (Shore A or D)	58D plaque	90A plaque	70D	70D
Composition (wt %)				
Iotek 1002	---	---	50	50
Iotek 1003	---	---	50	50
Bayflex 110-50 unfilled	100	---	---	---
Bayflex MP 10000	---	100	---	---

TABLE 1
CONTINUED

Outer Cover Layer	Example 2	Example 3	Example 4	Example 5
Hardness (Shore A or D)	57D	64D	90A plaque	64D
Thickness	0.055"	0.055"	0.040"	0.050"
Composition (wt %)				
Bayflex MP 10000	---	---	100	---
Exxon 1006	---	46.4	---	46.4
Exxon 1007	---	46.4	---	46.4
Iotek 8000	33.8%	---	---	---
Iotek 7510	58.9%	---	---	---
Iotek 7030	7.3	7.2	---	7.2
Whitener Package				
Unitane 0-110 (phr)	2.3	2.3	2.3	2.3
Eastobrite OB1 (phr)	0.025	0.025	0.025	0.025
Ultra Marine Blue (phr)	0.004	0.004	0.004	0.004
Final Ball Data				
Size	1.68"	1.68"	1.68"	1.68"
Weight	45.4g	45.4g	45.4g	45.4g
COR (X 1000)	770-780	770-780	770-780	770-780

DefinitionsFillers

In a particularly preferred form of the invention, at least one layer of the golf ball contains at least one part by weight of a filler. Fillers preferably are used to adjust the density, flex modulus, mold release, and/or melt flow index of a layer. More preferably, at least when the filler is for adjustment of density or flex modulus of a layer, it is present in an amount of at least five parts by weight based upon 100 parts by weight of the layer composition. With some fillers, up to about 200 parts by weight probably can be used.

10 A density adjusting filler according to the invention preferably is a filler which has a specific gravity which is at least 0.05 and more preferably at least 0.1 higher or lower than the specific gravity of the layer composition. Particularly preferred density adjusting fillers have specific gravities which are higher than the specific gravity of the resin composition by 0.2 or more, even
15 more preferably by 2.0 or more.

A flex modulus adjusting filler according to the invention is a filler which, when used in an amount of e.g. 1 - 100 parts by weight based upon 100 parts by weight of resin composition, will raise or lower the flex modulus (ASTM D-790) of the resin composition by at least 1% and preferably at least 5% as
20 compared to the flex modulus of the resin composition without the inclusion of the flex modulus adjusting filler.

A mold release adjusting filler is a filler which allows for the easier removal of a part from a mold, and eliminates or reduces the need for external release agents which otherwise could be applied to the mold. A mold release
25 adjusting filler typically is used in an amount of up to about 2 weight percent based upon the total weight of the layer.

A melt flow index adjusting filler is a filler which increases or decreases the melt flow, or ease of processing of the composition.

The layers may contain coupling agents that increase adhesion of
30 materials within a particular layer e.g. to couple a filler to a resin composition,

or between adjacent layers. Non-limiting examples of coupling agents include titanates, zirconates and silanes. Coupling agents typically are used in amounts of 0.1 - 2 weight percent based upon the total weight of the composition in which the coupling agent is included.

5 A density adjusting filler is used to control the moment of inertia, and thus the initial spin rate of the ball and spin decay. The addition in one or more layers, and particularly in the outer cover layer of a filler with a lower specific gravity than the resin composition results in a decrease in moment of inertia and a higher initial spin rate than would result if no filler were used. The addition in
10 one or more of the cover layers, and particularly in the outer cover layer of a filler with a higher specific gravity than the resin composition, results in an increase in moment of inertia and a lower initial spin rate. High specific gravity fillers are preferred as less volume is used to achieve the desired inner cover total weight. Nonreinforcing fillers are also preferred as they have minimal
15 effect on COR. Preferably, the filler does not chemically react with the resin composition to a substantial degree, although some reaction may occur when, for example, zinc oxide is used in a shell layer which contains some ionomer.

The density-increasing fillers for use in the invention preferably have a specific gravity in the range of 1.0 - 20. The density-reducing fillers for use in
20 the invention preferably have a specific gravity of 0.06 - 1.4, and more preferably 0.06 - 0.90. The flex modulus increasing fillers have a reinforcing or stiffening effect due to their morphology, their interaction with the resin, or their inherent physical properties. The flex modulus reducing fillers have an opposite effect due to their relatively flexible properties compared to the matrix
25 resin. The melt flow index increasing fillers have a flow enhancing effect due to their relatively high melt flow versus the matrix. The melt flow index decreasing fillers have an opposite effect due to their relatively low melt flow index versus the matrix.

Fillers which may be employed in layers other than the outer cover layer
30 may be or are typically in a finely divided form, for example, in a size generally

less than about 20 mesh, preferably less than about 100 mesh U.S. standard size, except for fibers and flock, which are generally elongated. Flock and fiber sizes should be small enough to facilitate processing. Filler particle size will depend upon desired effect, cost, ease of addition, and dusting considerations. The filler
 5 preferably is selected from the group consisting of precipitated hydrated silica, clay, talc, asbestos, glass fibers, aramid fibers, mica, calcium metasilicate, barium sulfate, zinc sulfide, lithopone, silicates, silicon carbide, diatomaceous earth, polyvinyl chloride, carbonates, metals, metal alloys, tungsten carbide, metal oxides, metal stearates, particulate carbonaceous materials, micro
 10 balloons, and combinations thereof. Non-limiting examples of suitable fillers, their densities, and their preferred uses are as follows:

FILLER TABLE

Filler Type	Spec. Grav.	Comments
Precipitated hydrated silica	2	1,2
Clay	2.62	1,2
Talc	2.85	1,2
Asbestos	2.5	1,2
Glass fibers	2.55	1,2
Aramid fibers (KEVLAR®)	1.44	1,2
Mica	2.8	1,2
Calcium metasilicate	2.9	1,2
Barium sulfate	4.6	1,2
Zinc sulfide	4.1	1,2
Lithopone	4.2 - 4.3	1,2
Silicates	2.1	1,2
Silicon carbide platelets	3.18	1,2
Silicon carbide whiskers	3.2	1,2
Tungsten carbide	15.6	1
Diatomaceous earth	2.3	1,2
Polyvinyl chloride	1.41	1,2

<u>Carbonates</u>		
Calcium carbonate	2.71	1,2
Magnesium carbonate	2.2	1,2
<u>Metals and Alloys (powders)</u>		
Titanium	4.51	1
Tungsten	19.35	1
Aluminum	2.7	1
Bismuth	9.78	1
Nickel	8.9	1
Molybdenum	10.2	1
Iron	7.86	1
Steel	7.8 - 7.9	1
Lead	11.4	1,2
Copper	8.94	1
Brass	8.2 - 8.4	1
Boron	2.34	1
Boron carbide whiskers	2.52	1,2
Bronze	8.70 - 8.74	1
Cobalt	8.92	1
Beryllium	1.84	1
Zinc	7.14	1
Tin	7.31	1
<u>Metal Oxides</u>		
Zinc oxide	5.57	1,2
Iron oxide	5.1	1,2
Aluminum oxide	4	
Titanium oxide	3.9 - 4.1	1,2
Magnesium oxide	3.3 - 3.5	1,2
Zirconium oxide	5.73	1,2

<u>Metal Stearates</u>		
Zinc stearate	1.09	3,4
Calcium stearate	1.03	3,4
Barium stearate	1.23	3,4
Lithium stearate	1.01	3,4
Magnesium stearate	1.03	3,4
<u>Particulate carbonaceous materials</u>		
Graphite	1.5 - 1.8	1,2
Carbon black	1.8	1,2
Natural bitumen	1.2 - 1.4	1,2
Cotton flock	1.3 - 1.4	1,2
Cellulose flock	1.15 - 1.5	1,2
Leather fiber	1.2 - 1.4	1,2
<u>Micro balloons</u>		
Glass	0.15 - 1.1	1,2
Ceramic	0.2 - 0.7	1,2
Fly ash	0.6 - 0.8	1,2
<u>Coupling Agents Adhesion Promoters</u>		
Titanates	0.95 - 1.17	
Zirconates	0.92 - 1.11	
Silane	0.95 - 1.2	

COMMENTS:

- 1 Particularly useful for adjusting density of the cover layer.
- 2 Particularly useful for adjusting flex modulus of the cover layer.
- 3 Particularly useful for adjusting mold release of the cover layer.
- 5 4 Particularly useful for increasing melt flow index of the cover layer.

All fillers except for metal stearates would be expected to reduce the melt flow index of an injection molded cover layer.

The amount of filler employed is primarily a function of weight requirements and distribution.

Scuff Resistance

The scuff resistance test was conducted in the following manner: a Top-Flite tour pitching wedge (1994) with box grooves was obtained and was mounted in a Miyamae driving machine. The club face was oriented for a square hit. The forward/backward tee position was adjusted so that the tee was four inches behind the point in the downswing where the club was vertical. The height of the tee and the toe-heel position of the club relative to the tee were adjusted in order that the center of the impact mark was about 3/4 of an inch above the sole and was centered to the heel across the face. The machine was operated at a club head speed of 125 feet per second. A minimum of three samples of each ball were tested. Each ball was hit three times. After testing, the balls were rated according to the following table:

<u>Rating</u>	<u>Type of Damage</u>
1	Little or no damage (groove markings or dents)
2	Small cuts and/or ripples in cover
3	Moderate amount of material lifted from ball surface, but still attached to ball
4	Material removed or barely attached

The balls that were tested were primed and top coated.

20 Cut Resistance

Cut resistance was measured in accordance with the following procedure: A golf ball was fired at 135 feet per second against the leading edge of a 1994 Top-Flite Tour pitching wedge, wherein the leading edge radius is 1/32 inch, the loft angle is 51 degrees, the sole radius is 2.5 inches, and the bounce angle is 7 degrees.

The cut resistance of the balls tested herein was evaluated on a scale of 1 - 5. A 5 represents a cut that extends completely through the cover to the core; a 4 represents a cut that does not extend completely through the cover but that

does break the surface; a 3 does not break the surface of the cover but does leave a permanent dent; a 2 leaves only a slight crease which is permanent but not as severe as 3; and a 1 represents virtually no visible indentation or damage of any sort.

5 Durability

Durability is determined by firing a golf ball at 135 ft/sec (at 72°F) into 5-sided steel pentagonal container, the walls of which are steel plates. The container 10, which is shown schematically in Fig. 1, has a 19 1/2 inch long insert plate 12 mounted therein, the central portion 14 of which has horizontally
10 extending square grooves on it which are intended to simulate a square grooved face of a golf club. The grooves, which are shown in an exaggerated form in Fig. 2, have a width 30 of 0.033 inches, a depth 32 of 0.100 inches, and are spaced apart from one another by land areas 34 having a width of 0.130 inches. The five walls 16 of the pentagonal container each have a length of 14 1/2
15 inches. The inlet wall is vertical and the insert plate is mounted such that it inclines upward 30° relative to a horizontal plane away from opening 20 in container 10. The ball travels 15 1/2 - 15 3/4 inches horizontally from its point of entry into the container 10 until it hits the square-grooved central portion 14 of insert plate 12. The angle between the line of trajectory of the ball and the
20 insert plate 12 is 30°. The balls are subjected to 70 or more blows (firings) and are inspected at regular intervals for breakage (i.e., any signs of cover cracking or delamination). If a microcrack forms in a ball, its speed will change and the operator is alerted. The operator then visually inspects the ball. If the microcrack cannot yet be observed, the ball is returned to the test until a crack
25 can be visually detected.

A ball is assigned a Durability Rating according to the following scale. A sample of twelve balls of the same type are obtained and are tested using the durability test apparatus described in the previous paragraph. If less than all of the balls in the sample survive 70 blows each without cracking, the ball is
30 assigned a Durability Rating of 1. If all of the balls survive 70 blows and one or

two of the twelve balls crack before 100 blows, the ball is assigned a Durability Rating of 2. If all twelve balls in the sample survive 100 blows each, but seven or more balls crack at less than 200 blows each, the ball is assigned a Durability Rating of 3. If all twelve balls in the sample survive 100 blows and at least six
5 out of the twelve balls in the sample also survive 200 blows, the balls is assigned a Durability Rating of 4.

Shore D Hardness

As used herein, "Shore D hardness" of a cover is measured generally in accordance with ASTM D-2240, except the measurements are made on the
10 curved surface of a molded cover, rather than on a plaque. Furthermore, the Shore D hardness of the cover is measured while the cover remains over the core. When a hardness measurement is made on a dimpled cover, Shore D hardness is measured at a land area of the dimpled cover.

Coefficient of Restitution

15 The resilience or coefficient of restitution (COR) of a golf ball is the constant "e," which is the ratio of the relative velocity of an elastic sphere after direct impact to that before impact. As a result, the COR ("e") can vary from 0 to 1, with 1 being equivalent to a perfectly or completely elastic collision and 0 being equivalent to a perfectly or completely inelastic collision.

20 COR, along with additional factors such as club head speed, club head mass, ball weight, ball size and density, spin rate, angle of trajectory and surface configuration (i.e., dimple pattern and area of dimple coverage) as well as environmental conditions (e.g. temperature, moisture, atmospheric pressure, wind, etc.) generally determine the distance a ball will travel when hit. Along
25 this line, the distance a golf ball will travel under controlled environmental conditions is a function of the speed and mass of the club and size, density and resilience (COR) of the ball and other factors. The initial velocity of the club, the mass of the club and the angle of the ball's departure are essentially provided by the golfer upon striking. Since club head, club head mass, the angle of
30 trajectory and environmental conditions are not determinants controllable by

golf ball producers and the ball size and weight are set by the U.S.G.A., these are not factors of concern among golf ball manufacturers. The factors or determinants of interest with respect to improved distance are generally the coefficient of restitution (COR) and the surface configuration (dimple pattern, ratio of land area to dimple area, etc.) of the ball.

The COR in solid core balls is a function of the composition of the molded core and of the cover. The molded core and/or cover may be comprised of one or more layers such as in multi-layered balls. In balls containing a wound core (i.e., balls comprising a liquid or solid center, elastic windings, and a cover), the coefficient of restitution is a function of not only the composition of the center and cover, but also the composition and tension of the elastomeric windings. As in the solid core balls, the center and cover of a wound core ball may also consist of one or more layers.

The coefficient of restitution is the ratio of the outgoing velocity to the incoming velocity. In the examples of this application, the coefficient of restitution of a golf ball was measured by propelling a ball horizontally at a speed of 125 ± 5 feet per second (fps) and corrected to 125 fps against a generally vertical, hard, flat steel plate and measuring the ball's incoming and outgoing velocity electronically. Speeds were measured with a pair of Oehler Mark 55 ballistic screens available from Oehler Research, Inc., P.O. Box 9135, Austin, Texas 78766, which provide a timing pulse when an object passes through them. The screens were separated by 36" and are located 25.25" and 61.25" from the rebound wall. The ball speed was measured by timing the pulses from screen 1 to screen 2 on the way into the rebound wall (as the average speed of the ball over 36"), and then the exit speed was timed from screen 2 to screen 1 over the same distance. The rebound wall was tilted 2 degrees from a vertical plane to allow the ball to rebound slightly downward in order to miss the edge of the cannon that fired it. The rebound wall is solid steel 2.0 inches thick.

As indicated above, the incoming speed should be 125 \pm 5 fps but corrected to 125 fps. The correlation between COR and forward or incoming speed has been studied and a correction has been made over the \pm 5 fps range so that the COR is reported as if the ball had an incoming speed of exactly 125.0
5 fps.

The coefficient of restitution must be carefully controlled in all commercial golf balls if the ball is to be within the specifications regulated by the United States Golf Association (U.S.G.A.). As mentioned to some degree above, the U.S.G.A. standards indicate that a "regulation" ball cannot have an
10 initial velocity exceeding 255 feet per second in an atmosphere of 75 F. when tested on a U.S.G.A. machine. Since the coefficient of restitution of a ball is related to the ball's initial velocity, it is highly desirable to produce a ball having sufficiently high coefficient of restitution to closely approach the U.S.G.A. limit on initial velocity, while having an ample degree of softness (i.e., hardness) to
15 produce enhanced playability (i.e., spin, etc.).

Compression

PGA compression is another important property involved in the performance of a golf ball. The compression of the ball can affect the playability of the ball on striking and the sound or "click" produced. Similarly,
20 compression can effect the "feel" of the ball (i.e., hard or soft responsive feel), particularly in chipping and putting.

Moreover, while compression itself has little bearing on the distance performance of a ball, compression can affect the playability of the ball on striking. The degree of compression of a ball against the club face and the
25 softness of the cover strongly influences the resultant spin rate. Typically, a softer cover will produce a higher spin rate than a harder cover. Additionally, a harder core will produce a higher spin rate than a softer core. This is because at impact a hard core serves to compress the cover of the ball against the face of the club to a much greater degree than a soft core thereby resulting in more
30 "grab" of the ball on the clubface and subsequent higher spin rates. In effect the

cover is squeezed between the relatively incompressible core and clubhead. When a softer core is used, the cover is under much less compressive stress than when a harder core is used and therefore does not contact the clubface as intimately. This results in lower spin rates.

5 The term "compression" utilized in the golf ball trade generally defines the overall deflection that a golf ball undergoes when subjected to a compressive load. For example, PGA compression indicates the amount of change in golf ball's shape upon striking. The development of solid core technology in two-piece balls has allowed for much more precise control of compression in
10 comparison to thread wound three-piece balls. This is because in the manufacture of solid core balls, the amount of deflection or deformation is precisely controlled by the chemical formula used in making the cores. This differs from wound three-piece balls wherein compression is controlled in part by the winding process of the elastic thread. Thus, two-piece and multilayer
15 solid core balls exhibit much more consistent compression readings than balls having wound cores such as the thread wound three-piece balls.

In the past, PGA compression related to a scale of from 0 to 200 given to a golf ball. The lower the PGA compression value, the softer the feel of the ball upon striking. In practice, tournament quality balls have compression ratings
20 around 70 - 110, preferably around 80 to 100.

In determining PGA compression using the 0 - 200 scale, a standard force is applied to the external surface of the ball. A ball which exhibits no deflection (0.0 inches in deflection) is rated 200 and a ball which deflects 2/10th of an inch (0.2 inches) is rated 0. Every change of .001 of an inch in deflection represents
25 a 1 point drop in compression. Consequently, a ball which deflects 0.1 inches (100 x .001 inches) has a PGA compression value of 100 (i.e., 200 - 100) and a ball which deflects 0.110 inches (110 x .001 inches) has a PGA compression of 90 (i.e., 200 - 110).

In order to assist in the determination of compression, several devices
30 have been employed by the industry. For example, PGA compression is

determined by an apparatus fashioned in the form of a small press with an upper and lower anvil. The upper anvil is at rest against a 200-pound die spring, and the lower anvil is movable through 0.300 inches by means of a crank mechanism. In its open position the gap between the anvils is 1.780 inches
5 allowing a clearance of 0.100 inches for insertion of the ball. As the lower anvil is raised by the crank, it compresses the ball against the upper anvil, such compression occurring during the last 0.200 inches of stroke of the lower anvil, the ball then loading the upper anvil which in turn loads the spring. The equilibrium point of the upper anvil is measured by a dial micrometer if the
10 anvil is deflected by the ball more than 0.100 inches (less deflection is simply regarded as zero compression) and the reading on the micrometer dial is referred to as the compression of the ball. In practice, tournament quality balls have compression ratings around 80 to 100 which means that the upper anvil was deflected a total of 0.120 to 0.100 inches.

15 An example to determine PGA compression can be shown by utilizing a golf ball compression tester produced by Atti Engineering Corporation of Newark, N.J. The value obtained by this tester relates to an arbitrary value expressed by a number which may range from 0 to 100, although a value of 200 can be measured as indicated by two revolutions of the dial indicator on the
20 apparatus. The value obtained defines the deflection that a golf ball undergoes when subjected to compressive loading. The Atti test apparatus consists of a lower movable platform and an upper movable spring-loaded anvil. The dial indicator is mounted such that it measures the upward movement of the springloaded anvil. The golf ball to be tested is placed in the lower platform,
25 which is then raised a fixed distance. The upper portion of the golf ball comes in contact with and exerts a pressure on the springloaded anvil. Depending upon the distance of the golf ball to be compressed, the upper anvil is forced upward against the spring.

Alternative devices have also been employed to determine compression.
30 For example, Applicant also utilizes a modified Riehle Compression Machine

originally produced by Riehle Bros. Testing Machine Company, Phil., PA to evaluate compression of the various components (i.e., cores, mantle cover balls, finished balls, etc.) of the golf balls. The Riehle compression device determines deformation in thousandths of an inch under a fixed initialized load of 200
5 pounds. Using such a device, a Riehle compression of 61 corresponds to a deflection under load of 0.061 inches.

Additionally, an approximate relationship between Riehle compression and PGA compression exists for balls of the same size. It has been determined by Applicant that Riehle compression corresponds to PGA compression by the
10 general formula $\text{PGA compression} = 160 - \text{Riehle compression}$. Consequently, 80 Riehle compression corresponds to 80 PGA compression, 70 Riehle compression corresponds to 90 PGA compression, and 60 Riehle compression corresponds to 100 PGA compression. For reporting purposes, Applicant's compression values are usually measured as Riehle compression and converted
15 to PGA compression.

Furthermore, additional compression devices may also be utilized to monitor golf ball compression so long as the correlation to PGA compression is know. These devices have been designed, such as a Whitney Tester, to correlate or correspond to PGA compression through a set relationship or formula.

20

What is claimed is:

1. A process of making a multi-piece golf ball comprising making at least one of a cover component and a core component of the ball by mixing two or more reactants that react and form a reaction product with a flex modulus of 5 - 310 kpsi in a reaction time of about 5 minutes or less, the component having a thickness of at least 0.01 inches and a demold time of 10 minutes or less.
2. A process according to claim 1, wherein the reaction product comprises at least one member selected from the group consisting of polyurethanes, polyureas, epoxies and unsaturated polyesters.
3. A process according to claim 1, wherein the reaction process comprises reaction injection molding.
4. A process according to claim 1, wherein the reaction product comprises at least one member selected from the group consisting of polyurethane and polyurea.
5. A process according to claim 4, wherein the reaction product with a flex modulus of 5 - 300 kpsi is formed in a reaction time of about 3 minutes or less.
6. A process according to claim 4, wherein the component has a thickness of at least 0.02 inches.
7. A process according to claim 4, wherein the component includes a cover component.
8. A process according to claim 7, wherein the cover component is a dimpled cover layer and the cover component has a thickness of at least 0.02 inches.
9. A process according to claim 7, wherein the cover component has a hardness of 20 - 95 Shore D.
10. A process according to claim 7, wherein the cover component has a hardness of 30 - 75 Shore D.
11. A process according to claim 1, wherein the component includes a core component.

12. A process according to claim 2, further including the step of recycling at least a portion of the reaction product.

13. A process according to claim 12, wherein the reaction product is recycled by glycolysis.

5 14. A multi-piece golf ball comprising a reaction injection molded material comprising polyurethane/polyurea.

15. A golf ball according to claim 14, wherein the reaction injection molded material comprising polyurethane/polyurea includes at least one of ether functional groups and ester functional groups.

10 16. A golf ball according to claim 14, wherein at least 5% of the polyurethane/polyurea is formed from molecules obtained by recycling a material comprising one of polyurethane, polyurea, polyester, and polyethylene glycol.

15 17. A golf ball according to claim 14, wherein recycling takes place by glycolysis.

18. A golf ball according to claim 14, wherein the ball has a core and a cover and at least the cover comprises reaction injection molded polyurethane/polyurea material.

20 19. A golf ball according to claim 18, wherein the ball includes an exterior coating surrounding the cover.

20. A golf ball according to claim 18, wherein the core is solid, multi-layer, wound, liquid filled, metal filled and/or foamed.

21. A golf ball according to claim 18, wherein the cover has a flex modulus of 5 - 310 kpsi.

25 22. A golf ball according to claim 18, wherein the cover has a flex modulus of 5 - 100 kpsi.

23. A golf ball according to claim 18, wherein the exterior coating is applied over the cover after molding of the cover.

30 24. A golf ball according to claim 18, wherein the hardness of the cover is 20 - 95 Shore D.

25. A golf ball according to claim 18, wherein the hardness of the cover is 30 - 75 Shore D.
26. A golf ball according to claim 25, wherein the flexural modulus of the cover is in the range 5 to 100 kpsi.
- 5 27. A golf ball according to claim 18, wherein the flexural modulus of the cover is higher than that of the core.
28. A golf ball according to claim 18, wherein the ball has a multi-layer cover.
29. A golf ball according to claim 18, wherein the cover comprises a
10 reaction injection molded material comprising polyurethane and further comprises at least one member selected from the group consisting of optical brightener, pigment, dye, antioxidant, and UV light stabilizer.
30. A golf ball according to claim 18, wherein the cover further comprises a filler.
- 15 31. A golf ball according to claim 30, wherein the filler includes at least one member selected from the group consisting of glass, metal, minerals, oxides, sulfides, titanates, polymeric resins and ceramics.
32. A golf ball according to claim 14, wherein the ball has a core and a cover, and at least the core comprises a reaction injection molded
20 polyurethane/polyurea material.
33. A golf ball according to claim 30, wherein the core comprises at least two components and at least one core component comprises reaction injection molded polyurethane/polyurea material.
34. A golf ball according to claim 14, wherein the ball has a core, and a
25 cover, each of which comprises reaction injection molded polyurethane/polyurea material.
35. A golf ball according to claim 30, wherein the cover comprises an ionomer.
36. A golf ball according to claim 14, wherein the polyurethane/polyurea
30 material incorporates meta-tetramethylxylylene diisocyanate.

37. A golf ball according to claim 18, wherein the cover has a generally uniform consistency both at the seam and the poles:

38. A process for producing a golf ball including the step (a) of: reaction injection molding a polyurethane/polyurea material to form at least one of a core
5 layer and a cover layer of the ball.

39. A process according to claim 36, further comprising the step of (b) recycling at least 20% of the polyurethane/polyurea that is produced in connection with step (a) but which is not incorporated into the ball during that step

10 40. A process for producing a golf ball comprising (a) forming a core, (b) covering the core, and (c) coating and adding indicia to the covered ball, wherein at least one of steps (a) and (b) comprises reaction injection molding of a polyurethane/polyurea material.

41. A process according to claim 38, further comprising the step of (d)
15 recycling at least 20% of the RIM-produced material comprising polyurethane that was produced consequent to step (a).

42. A golf ball comprising at least one fast-chemical-reaction-produced layer, said layer having a flex modulus of 5 - 310 kpsi in a reaction time of 5 minutes or less and a thickness of at least 0.01".

20 43. A golf ball according to claim 42, wherein said ball has a multi-layer cover and said at least one fast-chemical-reaction-produced layer is an inner cover layer.

44. A golf ball having a core and a cover, the cover comprising polyurethane/polyurea which is formed from reactants, 5 - 100 weight percent
25 of which are obtained from recycled polyurethane/polyurea.

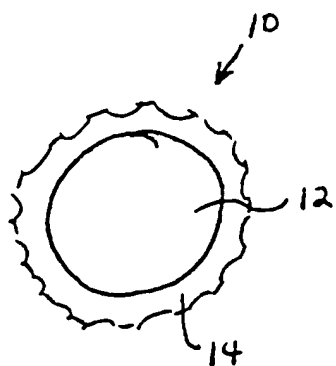


Fig. 1




Fig. 2




Fig. 3

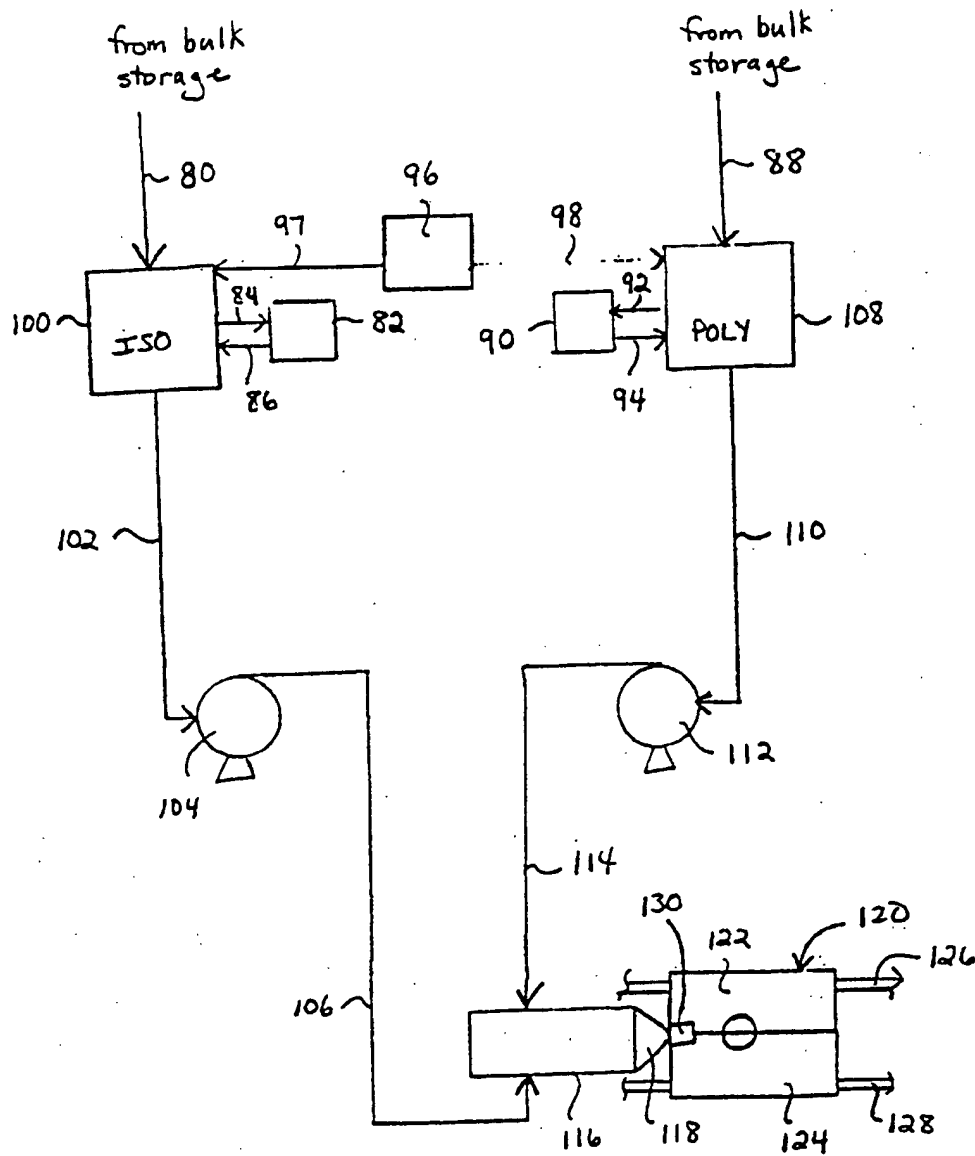


fig. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/06846

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : A63/B 37/06,08,12

US CL : 473/354,361,365,373,374,377; 273/digest 008

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 473/354,361,365,373,374,377; 273/digest 008

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

S-golf + ball + cover + reaction injection

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3,139,283 A (LESTER) 30 JUNE 1964.	
A	US 4,130,283 A (LINDQUIST) 19 DECEMBER 1978.	
A	US 4,932,663 A (MAKAR) 12 JUNE 1990	

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

26 MAY 1999

Date of mailing of the international search report

19 August 2000 (19.08.00)


Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

GEORGE J. MARLO

Telephone No. (703) 308-2094


Sheila Vanev
Patent Specialist
Technology Center 3700

